


SPECIFICATIONS

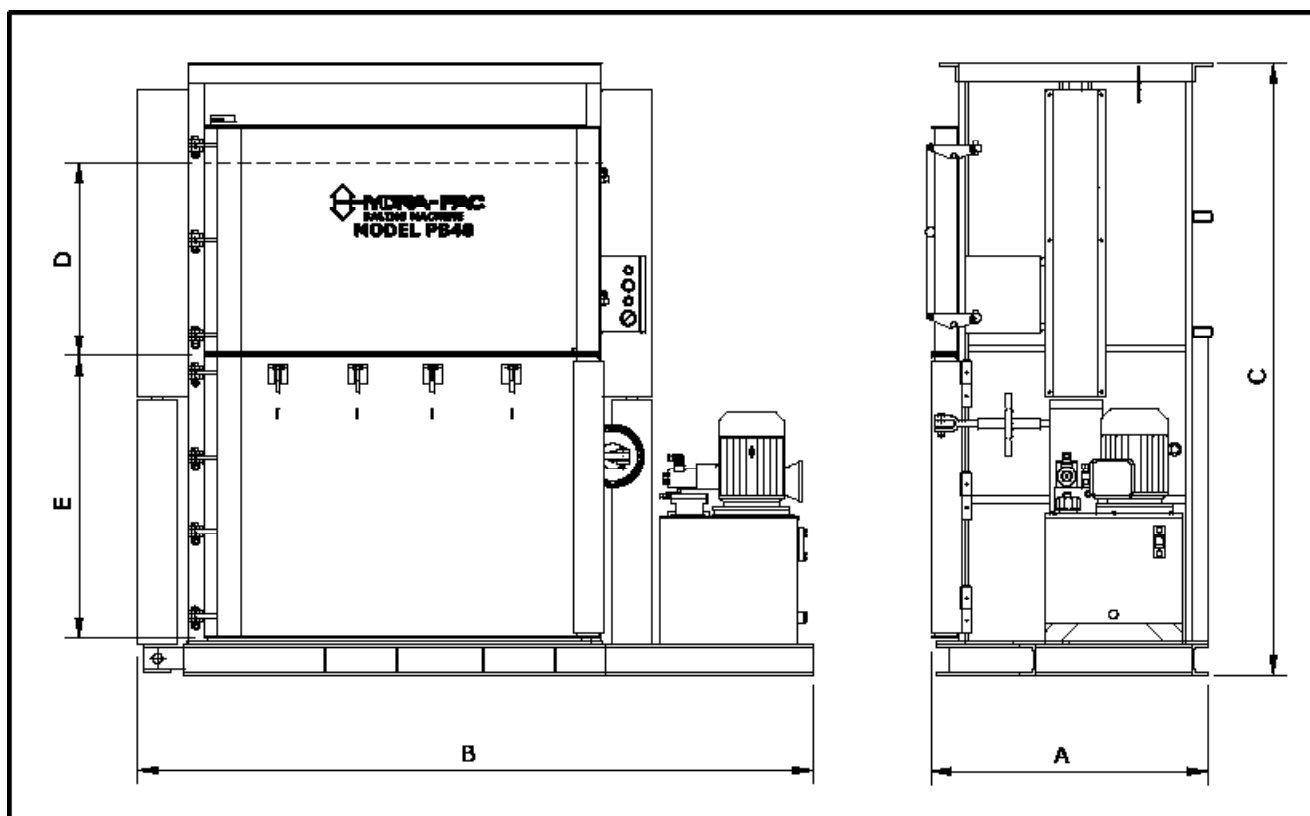

MODEL SPECS	A	B	C	D	E
PB48A	900	2195	2105	625	935
PB60A	900	2602	2155	625	935

MODEL		PB48A	PB60A
Expanded Bale Size	High (mm / in)	1015 / 40	1015 / 40
	Wide (mm / in)	1220 / 48	1220 / 48
	Deep (mm / in)	765 / 30	765 / 30
Bale Weight	Cardboard (kg)	240 - 250	325 - 375
	(lbs)	540 - 562	730 - 843
Loading Opening	(mm)	1220W x 625H	1520W x 625H
	(in)	48W x 27H	60W x 27H
Time Cycle		24 Seconds	34 Seconds
Electric Motor		4kW, 415 Volt, 3 Phase, 20 Amp	4kW, 415 Volt, 3 Phase, 20 Amp
Shipping Weight	Approx. (kg)	1,450	1,850
	(lbs)	3,260	4,160

Performance rates, bale weights and bale densities are subject to moisture content, material pre-bale density, method of feeding and other variables in baling.

Specifications subject to change without notice.
All imperial weights based on 1 Ton = 2240lbs.



proudly manufactured by:

TORQUE
INDUSTRIES

246 Grand Junction Road
Athol Park S.A. 5012
Ph: +61 8 8341 0177
Fax: +61 8 8341 1955

Visit our website
www.torqind.com

email: sales@torqind.com

Call Toll Free in Australia
(excluding South Australia)

1800 064 455