


# SPECIFICATIONS

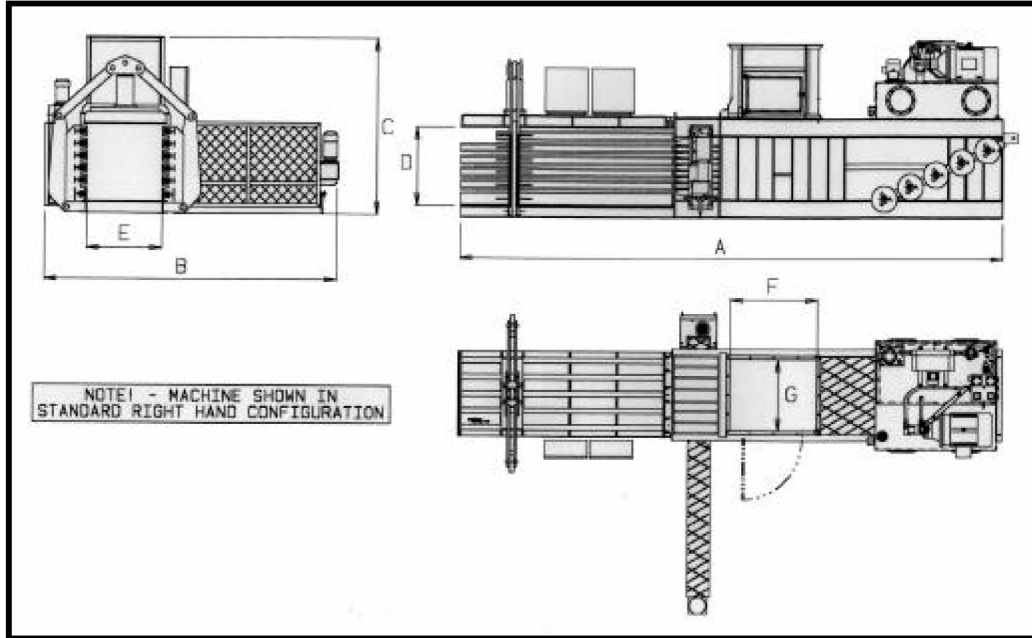

MODEL SPECS	A	B	C	D	E	F	G
HBA 4242-75C (mm)	7600	4052	2366	1050	1050	1270	1050
50" (in)	299	160	93	42	42	50	42
HBA 4242-110C (mm)	8473	4052	2366	1050	1050	1524	1050
60" (in)	333	160	93	42	42	60	42
HBA 4242-135C (mm)	11500	4114	2366	1050	1050	2032	1050
80" (in)	453	162	93	42	42	80	42

MODEL CHUTE OPENING	HBA 4242-75C 50"	HBA 4242-110C 60"	HBA 4242-135C 80"
Expanded Bale Size	1100mm x 1100mm x variable to 2200mm long 43" x 43" x variable to 88" long		
Bale Weight OCC Approx. (kg) (lbs)	Up to 1300kg. Up to 3000lbs		
Operating Pressure tons	75	110	135
Machine Capacity/Hr. (Tons) O.C.C. (Fluffed) O.N.P.	10 17	15 25	25 38
Ram Face Pressure PSI	97	143	171
Cycle Time (sec) (No Load)	15	12	9
Electric Motor (kW)	30 / 45	75	2 x 75
Main Cylinder (mm) (in)	254 10	254 10	254 10
Tension Cylinder (mm) (in)	228 9	254 10	254 10
Bale Tie Wires	5	5	5
Shipping Weight Approx. (kg)	18500	21500	25000

Performance rates, bale weights and bale densities are subject to moisture content, material pre-bale density, method of feeding and other variables in baling.



proudly manufactured by:

**TORQUE**  
INDUSTRIES

246 Grand Junction Road  
Athol Park S.A. 5012  
Ph: +61 8 8341 0177  
Fax: +61 8 8341 1955

Visit our website  
www.torqind.com

email: sales@torqind.com

Call Toll Free in Australia  
(excluding South Australia)

**1800 064 455**